



Refrigerated



US LISTED

BALDOCK

REFRIGERATION

Equipment



Refrigerated Bench
 Refrigerated Pizza Table
 Salad Table & Wall Mounted Refrigerated Cabinet
 Blast Freezer & Bar Glass Counter
 Upright Fridge, Freezer & Blast Banquet Cart Refrigerator
 Beverage Showcase
 Supermarket Showcase
 Ice Cream Showcase
 Cake Showcase
 Hotel Mini Fridge
 Red Wine Cabinet
 Walk In Cool Room & Freezer Room
 Refrigerated Bench
 Refrigerated Pizza Table
 Salad Table & Wall Mounted Refrigerated Cabinet
 Blast Freezer & Bar Glass Counter
 Upright Fridge, Freezer & Blast Banquet Cart Refrigerator
 Beverage Showcase
 Supermarket Showcase
 Ice Cream Showcase
 Cake Showcase
 Hotel Mini Fridge
 Red Wine Cabinet
 Walk In Cool Room & Freezer Room

*custom-made Size and Model Acceptable

Refrigerated Counter



CK-SCC2

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC2-1

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC2-2

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC2-3

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC2-4

Length: 1365mm
Depth: 700mm
Height: 850mm
Frig Power: 336w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 260L
Net Weight: 92kg



CK-SCC3

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC3-1

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC3-2

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg

Refrigerated Counter



CK-SCC3-3

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC3-4

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC3-5

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 360w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 113kg



CK-SCC4

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-1

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-2

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-3

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-4

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SCC4-5

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg

Refrigerated Counter



CK-SCC2G

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 348w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 117kg



CK-SCC3G

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 348w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 117kg



CK-SCC4G

Length: 1795mm
Depth: 700mm
Height: 850mm
Frig Power: 348w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 400L
Net Weight: 117kg



CK-SSC2

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



CK-SSC3

Length: 2230mm
Depth: 700mm
Height: 850mm
Frig Power: 470w
Refrigerant: R134a
Temperature Range: +2°C~+8°C
Capacity: 540L
Net Weight: 134kg



Refrigerated Pizza Table

CK-SPZM3-700

Dimension (LxWxH): 1400x700x1450 mm
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Static with fan
N.W/G.W: 165/177 Kg

Pizza Table & Salad Counter



CE

Refrigerated Pizza Table CK-SPZM2-800

Dimension(LxWxH): 1510x800x1415 mm
 Voltage:220V/50Hz
 Power:0.32Kw
 Volume:390L
 Temperature Range: 2°C~8°C
 Refrigerant: R134a
 Type of Cooling: Ventilated
 N.W/G.W: 194/218Kg



CE

Refrigerated Pizza Table CK-SPZM6D-800

Dimension(LxWxH): 1510x800x1415 mm
 Voltage:220V/50Hz
 Power:0.32Kw
 Volume:390L
 Temperature Range: 2°C~8°C
 Refrigerant: R134a
 Type of Cooling: Ventilated
 N.W/G.W: 194/218Kg



CE

Refrigerated Pizza Table CK-SPZM3-800

Dimension(LxWxH): 1510x800x1415 mm
 Voltage:220V/50Hz
 Power:0.32Kw
 Volume:390L
 Temperature Range: 2°C~8°C
 Refrigerant: R134a
 Type of Cooling: Ventilated
 N.W/G.W: 194/218Kg



CE

Sandwich Preparation Counter CK-SPZ2-700

Dimension(LxWxH): 1510x800x1415 mm
 Voltage:220V/50Hz
 Power:0.32Kw
 Volume:390L
 Temperature Range: 2°C~8°C
 Refrigerant: R134a
 Type of Cooling: Ventilated
 N.W/G.W: 194/218Kg



CE

Sandwich Preparation Counter CK-SPZ3-700

Dimension(LxWxH): 1510x800x1415 mm
 Voltage:220V/50Hz
 Power:0.32Kw
 Volume:390L
 Temperature Range: 2°C~8°C
 Refrigerant: R134a
 Type of Cooling: Ventilated
 N.W/G.W: 194/218Kg



CE

Sandwich Preparation Counter CK-SPZ2-800

Dimension(LxWxH): 1510x800x1415 mm
 Voltage:220V/50Hz
 Power:0.32Kw
 Volume:390L
 Temperature Range: 2°C~8°C
 Refrigerant: R134a
 Type of Cooling: Ventilated
 N.W/G.W: 194/218Kg



CE

Refrigerated Pizza Table CK-SPZ3-800

Dimension(LxWxH): 1510x800x1415 mm
 Voltage:220V/50Hz
 Power:0.32Kw
 Volume:390L
 Temperature Range: 2°C~8°C
 Refrigerant: R134a
 Type of Cooling: Ventilated
 N.W/G.W: 194/218Kg



CE

Refrigerated Pizza Table CK-SSL3D4

Dimension(LxWxH): 1510x800x1415 mm
 Voltage:220V/50Hz
 Power:0.32Kw
 Volume:390L
 Temperature Range: 2°C~8°C
 Refrigerant: R134a
 Type of Cooling: Ventilated
 N.W/G.W: 194/218Kg



CE

Refrigerated Pizza Table CK-SPZ900ST

Dimension(LxWxH): 1510x800x1415 mm
 Voltage:220V/50Hz
 Power:0.32Kw
 Volume:390L
 Temperature Range: 2°C~8°C
 Refrigerant: R134a
 Type of Cooling: Ventilated
 N.W/G.W: 194/218Kg

Salad Table



**Salad Table
CK-SSL1**

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 70/75Kg



**Salad Table
CK-SSL2**

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 70/75Kg



**Salad Table
CK-SSL3**

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 70/75Kg



**Salad Table
CK-SSL4**

Dimension(LxWxH): 900x700x1075 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 89/100Kg



**Salad Table
CK-SSL5**

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 72/82Kg



**Salad Table
CK-SSL6**

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 72/82Kg



**Salad Table
CK-SSL7**

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 85/105Kg



**Salad Table
CK-SSL8**

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 80/90Kg



**Salad Table
CK-SSL9**

Dimension(LxWxH): 900x700x850 mm
Voltage: 220V/50Hz
Power: 0.204Kw
Volume: 250L
Temperature Range: 2°C~8°C
Refrigerant: R134a
Type of Cooling: Ventilated
N.W/G.W: 88/98Kg

Blast Freezer & Back Bar Cooler



**Blast Freezer
CK-HBF3**

Dimension(LxWxH): 800×815×925mm
Voltage: 230V/50Hz
Interior size: 600x420x330mm
Temperature: 70/3°C in 90min
Temperature: 70/-18°C in 240min
Power: 703 W
Capacity: 3 1/1 GN



**Blast Freezer
CK-HBF5**

Dimension(LxWxH): 800×815×1015mm
Voltage: 230V/50Hz
Net weight: 95 kg
Interior size: 600x420x400mm
Temperature: 70/3°C in 90min
Temperature: 70/-18°C in 240min
Power: 801 W
Capacity: 5 1/1 GN



**Blast Freezer
CK-HBF10**

Exteriou Size(LxWxH): 800x815x1645mm
Interior Size: 600x420x870 mm
Voltage: 230V/50Hz
Power: 1398W
Pan support(GN/1):10Prirs
Pan support(400x600mm):10Prirs

CK-HBF14

Exteriou Size(LxWxH): 800x815x2170mm
Interior Size: 600x420x1170 mm
Voltage: 230V/50Hz
Power: 2000W
Pan support(GN/1):14Prirs
Pan support(400x600mm):14Prirs



**Back Bar Bottle Cooler
BC-D1**

Dimension(LxWxH): 600x510x895mm
Temperature: 2-10 °C
Power: 145 W
Door: 1 pcs
Volume: 115L
Mode: Air Cooling
Refrigerant: R134a



**Back Bar Bottle Cooler
BC-D2**

Dimension(LxWxH): 920x510x895mm
Temperature: 2-10 °C
Power: 145 W
Door: 2 pcs
Volume: 210L
Mode: Air Cooling
Refrigerant: R134a



**Back Bar Bottle Cooler
BC-D3**

Dimension(LxWxH): 920x510x895mm
Temperature: 2-10 °C
Power: 145 W
Door: 3 pcs
Volume: 303L
Mode: Air Cooling
Refrigerant: R134a



Upright Fridge & Freezer



Upright Chiller With 1 Full Door

CK-SUC660

Size (LxWxH mm): 660×780×2010
 Type of cooling: Ventilated
 Temperature: +2~+8°C
 Packing Size(LxWxH mm): 730x850x2050
 Refrigerant Gas: R134a
 Capacity: 527L
 Shelf: 3
 Net Weight (kgs): 106
 Gross Weight(kgs): 120
 Qty Of 20FT: 18
 Qty of 40FT: 39
 Qty of 40 HQ FT: 39
 CE Approval



Upright Freezer With 1 Full Door

CK-SUF660

Size (LxWxH mm): 660×780×2010
 Type of cooling: Ventilated
 Temperature: -18 ~-22°C
 Packing Size(LxWxH mm): 730x850x2050
 Refrigerant Gas: R134a
 Capacity: 527L
 Shelf: 3
 Net Weight (kgs): 111
 Gross Weight(kgs): 116
 Qty Of 20FT: 18
 Qty of 40FT: 39
 Qty of 40 HQ FT: 39
 CE Approval



Upright Chiller With 2 Full Doors

CK-SUC1340

Size (LxWxH mm): 1340×800×2040
 Type of cooling: Ventilated
 Temperature: +2~+8°C
 Packing Size(LxWxH mm): 1380x850x2050
 Refrigerant Gas: R134a
 Net Weight (kgs): 136
 Gross Weight(kgs): 150
 Qty Of 20FT: 10
 Qty of 40FT: 22
 Qty of 40 HQ FT: 22
 CE Approval



Upright Freezer With 2 Full Doors

CK-SUF1340

Size (LxWxH mm): 1340×800×2040
 Type of cooling: Ventilated
 Temperature: +2~+8°C
 Packing Size(LxWxH mm): 1380x850x2050
 Refrigerant Gas: R134a
 Net Weight (kgs): 136
 Gross Weight(kgs): 150
 Qty Of 20FT: 10
 Qty of 40FT: 22
 Qty of 40 HQ FT: 22
 CE Approval



Upright Chiller With 2 Half Doors

CK-SUC2D-660

Size (LxWxH mm): 660×780×2010
 Type of cooling: Ventilated
 Temperature: +2~+8°C
 Packing Size(LxWxH mm): 730x850x2050
 Refrigerant Gas: R134a
 Capacity: 1285L
 Shelf: 3
 Net Weight (kgs): 106
 Gross Weight(kgs): 120
 Qty Of 20FT: 18
 Qty of 40FT: 39
 Qty of 40 HQ FT: 39
 CE Approval



Upright Freezer With 2 Half Doors

CK-SUF2D-660

Size (LxWxH mm): 660×780×2010
 Type of cooling: Ventilated
 Temperature: -18 ~-22°C
 Packing Size(LxWxH mm): 730x850x2050
 Refrigerant Gas: R134a
 Net Weight (kgs): 106
 Gross Weight(kgs): 120
 Qty Of 20FT: 18
 Qty of 40FT: 39
 Qty of 40 HQ FT: 39
 CE Approval

Customizable Chiller



**Upright Chiller 2 Half Door
304SCK-UC395-2**

Main material: SS 304
Dimension(mm): 620×760×1980
Voltage: 220V/50Hz
Power: 427W
Volume: 395L
Temperature: -5°C~10°C
Compressor: Embraco
Refrigerant: R134a
Cool mode: Ventilated



**Upright Chiller 4 Half Door
304SCK-UC865-4**

Main material: SS 304
Dimension(mm): 1210×760×1980
Voltage: 220V/50Hz
Power: 633W
Volume: 865L
Temperature: -5°C~10°C
Refrigerant: R134a
Cool mode: Ventilated
Compressor: Embraco



**Upright Freezer 6 Half Door
304SCK-UC1340-6**

Main material: SS 304
Dimension(mm): 1800×760×1980
Voltage: 220V/50Hz
Power: 887W
Volume: 1340L
Temperature: -5°C~+10°C
Compressor: Embraco
Refrigerant: R404A
Cool mode: Ventilated
Doors: 6 stainless steel doors



**Europe Type Upright Chiller
1 Half Door with 3 Drawers
304SCKE-U1M-WD**

Main material: SS 304
Dimension(mm): 737×815×1975
Voltage: 220V/50Hz
Volume: 450L
Temperature: -2°C~+4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 4pcs



**Europe Type Upright Chiller
2 Half Glass Door
304SCKE-U1M-HD-GD**

Main material: SS 304
Dimension(mm): 737×815×1975
Voltage: 220V/50Hz
Volume: 555L
Temperature: -2°C~+4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 4pcs



**Europe Type Upright Chiller
4 Half Glass Door
304SCKE-U2M-HD-GD**

Main material: SS 304
Dimension(mm): 1400×815×1975
Voltage: 220V/50Hz
Volume: 1182L
Temperature: -2°C~+4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 8pcs

Customizable Chiller



**Europe Type Upright Chiller
1 Channel Door
304SCKE-U1M-HD-PT**

Main material: SS 304
Dimension(mm): 737×815×1975
Voltage: 220V/50Hz
Volume: 555L
Temperature: -2°C~+4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 4pcs



**Europe Type Upright Chiller
2 Channel Door
304SCKE-U2M-FD-PT**

Main material: SS 304
Dimension(mm): 1400×815×1975
Voltage: 220V/50Hz
Volume: 1182L
Temperature: -2°C~+4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 8pcs



**Europe Type Counter Chiller 2 Door
304SCKE-C12M-XDD**

Main material: SS 304
Dimension(mm): 1420×700×850
Voltage: 220V/50Hz
Volume: 274L
Temperature: -2°C~4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 4pcs



**Europe Type Counter Chiller 3 Doors
304SCKE-C13M-X2D**

Main material: SS 304
Dimension(mm): 1885×700×850
Voltage: 220V/50Hz
Volume: 423L
Temperature: -2°C~4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 6pcs



**Europe Type Counter Chiller 4 Door
304SCKE-14M-XDDDD**

Main material: SS 304
Dimension(mm): 2350×700×850
Voltage: 220V/50Hz
Volume: 600L
Temperature: -2°C~4°C
Compressor: Embraco
Doors: stainless steel doors
Shelves: 8pcs

Beverage Showcase



CE



CE



CE

Model	Dimension (L×W×H mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m ²)	Refrigeration Power (W)	Lighting Power (W)	Voltage (V)	Cooling Mode
SP-20CL	2000×1180×1280	2 ~ 8	650	1.8	490	40	220	Ventilated
SP-25CL	2500×1180×1280	2 ~ 8	850	2.5	780	60	220	Ventilated
SP-20F	2000×1180×1280	2 ~ 8	650	1.8	780	40	220	Ventilated
SP-25F	2500×1180×1280	2 ~ 8	850	2.5	780	60	220	Ventilated
SP-20SL	2000×1180×1280	2 ~ 8	650	1.8	490	40	220	Ventilated
SP-25SL	2500×1180×1280	2 ~ 8	850	2.5	780	60	220	Ventilated

Model	Dimension (L×W×H mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m ²)	Heating Power (W)	Lighting Power (W)	Voltage (V)
SP-H20CL	2000×1180×1280	30 ~ 65	650	1.8	1500	40	220
SP-H25CL	2500×1180×1280	30 ~ 65	850	2.5	2000	60	220
SP-H20F	2000×1180×1280	30 ~ 65	650	1.8	1500	40	220
SP-H25F	2500×1180×1280	30 ~ 65	850	2.5	2000	60	220



CE




CE



CE

Model	Dimension (L×W×H mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m ²)	Refrigeration Power (W)	Lighting Power (W)	Voltage (V)	Cooling Mode
SP-BS1V	600×700×2100	0 ~ 10	310	0.82	240	12	220	Ventilated
SP-BS2V	1200×700×2100	0 ~ 10	670	1.65	380	70	220	Ventilated
SP-BS3V	1800×700×2100	0 ~ 10	1100	2.48	530	120	220	Ventilated

Supermarket Showcase

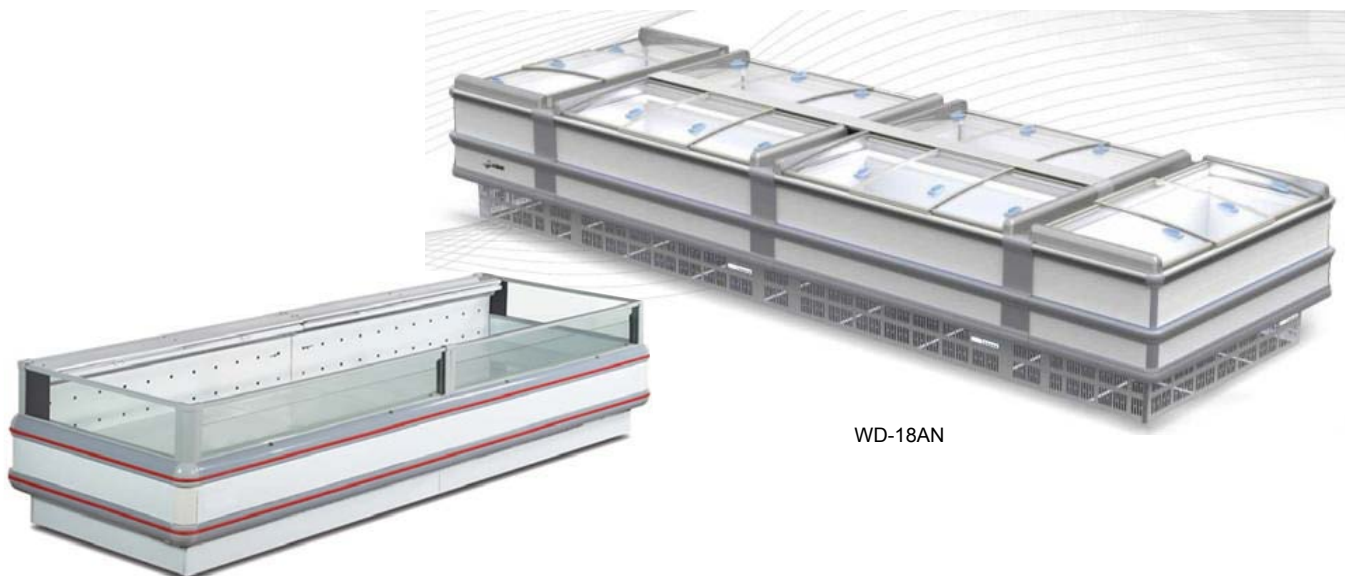

WD-18AN

Model	Dimension (L×W×H mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m ²)	Heating Power (W)	Voltage (V)	Cooling Mode	Notes
WD-18AN	5500×1850×1025	-18 ~ -22	4080	10.2	3900	220	Ventilated	Stainless steel
SP-I20	2000×1850×1025	-18 ~ -22	520	2.1	2800	220	Ventilated	Stainless steel



LFG Series



PFG Series

Model	Dimension (L×W×H mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m ²)	Refrigeration Power (W)	Lighting Power (W)	Voltage (V)	Cooling Mode	Notes
SP-V12	1200×800×1950	2 ~ 10	520	2.2	920	240	220	Ventilated	Engine Inside
SP-V15	1500×800×1950	2 ~ 10	650	2.8	1100	240	220	Ventilated	Engine Inside
SP-V20	2000×950×1950	2 ~ 10	1000	3.6	1300	240	220	Ventilated	Engine Inside
SP-V25	2500×950×1950	2 ~ 10	1280	3.8	1500	360	220	Ventilated	Engine Inside
SP-V20S	2000×1100×2060	2 ~ 10	1300	4.5		240	220/380	Ventilated	Engine Inside
SP-V25S	2500×1100×2060	2 ~ 10	1680	4.9		360	220/380	Ventilated	Engine Inside

Model	Dimension (L×W×H mm)	Temperature (°C)	Capacity (L)	Panoptic Area (m ²)	Heating Power (W)	Lighting Power (W)	Voltage (V)	Cooling Mode	Notes
SP-V20T	2000×980×1650	2 ~ 10	860	2.5	1100	120	220	Ventilated	Engine Inside
SP-V25T	2500×980×1650	2 ~ 10	1100	3	1300	180	220	Ventilated	Engine Inside
PFG-20Y	2000×980×1650	2 ~ 10	860	1.8		120	220/380	Ventilated	Engine Inside
PFG-25Y	2500×980×1650	2 ~ 10	1100	2.5		180	220/380	Ventilated	Engine Inside

Cake Showcase



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
TCS - M9CD54	427	2~8	115	900x540x790	112kgs	2
TCS - M12CD54	518	2~8	155	1200x540x790	134kgs	2
TCS - M15CD54	530	2~8	200	1500x540x790	157kgs	2



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
TCS - M9FD54	485	2~8	192	900x540x930	140kgs	3
TCS - M12FD54	598	2~8	260	1200x540x930	170kgs	3
TCS - M15FD54	626	2~8	330	1500x540x930	199kgs	3



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
TCS - M9F54	420	2~8	140	900x540x790	90kgs	2
TCS - M12F54	550	2~8	190	1200x540x790	115kgs	2
TCS - M15F54	570	2~8	240	1500x540x790	120kgs	2



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
TCS - M9F54H	467	2~8	192	900x540x930	95kgs	3
TCS - M12F54H	602	2~8	260	1200x540x930	115kgs	3
TCS - M15F54H	724	2~8	330	1500x540x930	130kgs	3



CE


Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
TCS - M9C54	420	2~8	115	900x540x790	95kgs	2
TCS - M12C54	550	2~8	155	1200x540x790	115kgs	2
TCS - M15C54	570	2~8	200	1500x540x790	130kgs	2

Cake Showcase



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
TCS - M9CS47	340	2~8	70	900x470x680	83kgs	2
TCS - M12CS47	472	2~8	94	1200x470x680	90kgs	2
TCS - M15CS47	492	2~8	118	1500x470x680	105kgs	2

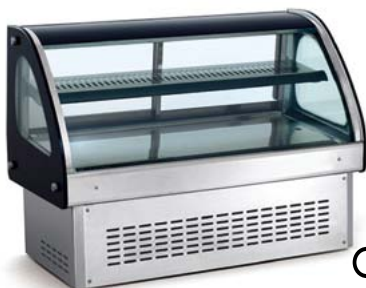

CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
TCS - M9CS53	420	2~8	70	900x530x820	90kgs	2
TCS - M12CS53	550	2~8	94	1200x530x820	150kgs	2
TCS - M15CS53	570	2~8	118	1500x530x820	120kgs	2



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
THCS - M9CD54	770	40~75	115	900x540x790	97kgs	2
THCS - M12CD54	810	40~75	155	1200x540x790	119kgs	2
THCS - M15CD54	850	40~75	200	1500x540x790	141kgs	2



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
THCS - M9FD54	830	40~75	192	900x540x790	121kgs	3
THCS - M12FD54	890	40~75	260	1200x540x790	152kgs	3
THCS - M15FD54	950	40~75	330	1500x540x790	179kgs	3



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight	Shelves
TCS - M9C54	765	40~75	115	900x540x790	95kgs	2
TCS - M12C54	805	40~75	155	1200x540x790	115kgs	2
TCS - M15C54	845	40~75	200	1500x540x790	120kgs	2

Cake Showcase



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
THCS-M9F54	765	40~75	140	900x540x790	80	2
THCS-M12F54	805	40~75	190	1200x540x790	95	2
THCS-M15F54	845	40~75	240	1500x540x790	110	2



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
PCS-M9	540	2~8	319	900x700x1300	150	2
PCS-M12	683	2~8	407	1200x700x1300	173	2
PCS-M15	817	2~8	501	1500x700x1300	200	2

Color Available:



Black White



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
FCS-M9C73	683	2~8	225	900x730x1200	200	3
FCS-M12C73	780	2~8	310	1200x730x1200	280	3
FCS-M15C73	937	2~8	395	1500x730x1200	320	3
FCS-M18C73	999	2~8	480	1800x730x1200	360	3
FCS-M24C73	1354	2~8	650	2400x730x1200	465	3

Color Available:



Yellow Green Red Black White



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
FCS-M9C84	633	2~8	260	900x840x1200	200	3
FCS-M12C84	780	2~8	360	1200x840x1200	280	3
FCS-M15C84	937	2~8	460	1500x840x1200	320	3
FCS-M18C84	999	2~8	560	1800x840x1200	360	3
FCS-M24C84	1534	2~8	760	2400x840x1200	465	3

Color Available:



Yellow Green Red Black White



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
FCS-M9C81	733	2~8	340	900x810x1200	200	4
FCS-M12C81	874	2~8	470	1200x810x1200	280	4
FCS-M15C81	968	2~8	600	1500x810x1200	320	4
FCS-M18C81	1145	2~8	730	1800x810x1200	360	4
FCS-M24C81	1384	2~8	990	2400x810x1200	465	4

Color Available:



Yellow Green Red Black White

Cake Showcase



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
FCS-M9C75	644	2~8	349	900x750x1200	260	4
FCS-M12C75	847	2~8	400	1200x750x1200	847	4
FCS-M15C75	974	2~8	600	1500x750x1200	974	4
FCS-M18C75	1151	2~8	650	1800x750x1200	1151	4

Color Available:



Yellow Green Red Black White



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
FCS-M9C79	581	2~8	270	900x790x1200	215	3
FCS-M12C79	718	2~8	375	1200x790x1200	255	3
FCS-M15C79	865	2~8	475	1500x790x1200	295	3
FCS-M18C79	960	2~8	575	1800x790x1200	335	3
FCS-M24C79	1282	2~8	780	2400x790x1200	415	3

Color Available:



Yellow Green Red Black White



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
FCS-M9C78	583	2~8	269	900x780x1200	185	3
FCS-M12C78	712	2~8	372	1200x780x1200	225	3
FCS-M15C78	848	2~8	474	1500x780x1200	260	3
FCS-M18C78	909	2~8	576	1800x780x1200	300	3
FCS-M24C78	1247	2~8	781	2400x780x1200	380	3

Color Available:



Yellow Green Red Black White



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
FCS-M9F68	626	2~8	285	900x680x1200	215	3
FCS-M12F68	769	2~8	390	1200x680x1200	260	3
FCS-M15F68	923	2~8	500	1500x680x1200	300	3
FCS-M18F68	990	2~8	610	1800x680x1200	345	3
FCS-M24F68	1314	2~8	825	2400x680x1200	435	3

Color Available:



Yellow Green Red Black White



CE

Model	Power (W)	Temperature (°C)	Capacity(L)	Dimension (L×W×H mm)	Net Weight (kgs)	Shelves
FCS-M9F72	541	2~8	250	900x730x1200	215	2
FCS-M12F72	647	2~8	344	1200x730x1200	260	2
FCS-M15F72	706	2~8	438	1500x730x1200	300	2
FCS-M18F72	881	2~8	532	1800x730x1200	345	2
FCS-M24F72	1149	2~8	720	2400x730x1200	435	2

Color Available:



Yellow Green Red Black White

Wine Cooler



**Wine Cooler(Compressor)
WC-V208-84**

Dimension(mm): 598×605×1250
Ventilated
Capacity: 208L, 84 bottles
Temperature: 5~22°C
Power: 120W
Packing Size: 660×640×1300mm
Weight: 73kg
Working Temperature: 0-38°C



**Wine Cooler(Compressor)
WC-V308-120**

Dimension(mm): 598×605×1650
Ventilated
Capacity: 308L, 120 bottles
Temperature: 5~22°C
Power: 165W
Packing Size: 660×640×1700mm
Weight: 88kg
Working Temperature: 0-38°C



**Wine Cooler(Compressor)
WC-V308-84**

Dimension(mm): 598×605×1650
Cooling Mode: Static
Capacity: 308L, 84 bottles
Temperature: 5~22°C
Power: 120W
Packing Size: 660×640×1700mm
Weight: 116kg
Working Temperature: 0-38°C




**Wine Cooler(Compressor)
WC-V960-280**

Dimension(mm): 1250×650×2200
Cooling Mode: Ventilated
Capacity: 960L, 280 bottles
Temperature: 5~22°C
Power: 380W
Packing Size: 1350×750×2320mm
Weight: 210kg
Working Temperature: 0-38°C



FB-07

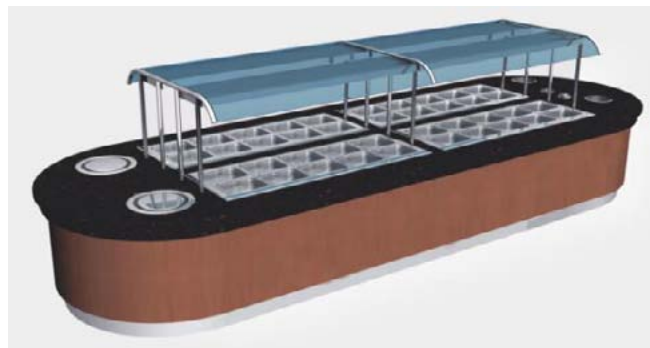

Cake Showcase & Ice Cream Showcase



**Chocolate Showcase
CS-ZCHO1**

Size(mm): 1130×850×900
Temperature: 2~8℃
Refrigerant: R134a
Voltage: 220v/50hz
Power(w): 500
Power consumption(kw/24h): 8.5
Capacity(L): 169

Computer delay protection,
Automatic Defogger with
humidification, 2 drawers



**Chocolate Showcase
CS-ZCHO2**

Size(mm): 1640×850×900
Temperature: 2~8℃
Refrigerant: R134a
Voltage: 220v/50hz
Power(w): 780
Power consumption(kw/24h): 12.5
Capacity(L): 268

Computer delay protection,
Automatic Defogger with
humidification, 3 drawers



**Chocolate Showcase
CS-ZCHO3**

Size(mm): 2150×850×900
Temperature: 2~8℃
Refrigerant: R134a
Voltage: 220v/50hz
Power(w): 1050
Power consumption(kw/24h): 16.6
Capacity(L): 360

Computer delay protection,
Automatic Defogger with
humidification, 4 drawers



**Sushi Showcase
SU-Z12**

Size(mm): 1200×376×385
Temperature: 2~8℃
Refrigerant: R134a
Voltage: 220v/50hz
Power: 450W
Power Consumption:
10.8kw/24h
Capacity: 75L

**Sushi Showcase
SU-Z15**

Size(mm): 1500×376×385
Temperature: 2~8℃
Refrigerant: R134a
Voltage: 220v/50hz
Power: 500W
Power Consumption:
12kw/24h
Capacity: 105L

**Sushi Showcase
SU-Z15**

Size(mm): 1800×376×385
Temperature: 2~8℃
Refrigerant: R134a
Voltage: 220v/50hz
Power: 600W
Power Consumption:
14.4kw/24h
Capacity: 131L



**Sushi Robot
SPJX-CD03**

Dimension: 328×483×653mm
Voltage: AC100-230V, 50/60hz, 65W
Sushi Weight: 18-20g
N.W: 30Kg
 700~300pcs can be produced
per hour



**Rice Sheet Robot
SPJX-CD02**

Dimension: 392×591×699mm
Voltage: 110V-240V
Power: 50/60hz, 150W
Weight: 48kg
 Compact and simple stype



**Rice Sheet Robot
SPJX-CD01**

Dimension: 392×591×699mm
Voltage: 100-230V/50/60Hz
Power: 150W
Sushi Weight: 70-90g(S),
120-150g(M), 200-270g(L)
N.W: 66Kg



**Refrigerant Bain Marie
CKA-S01**

Main material: sus: 304
Size (L×W×H mm): 770×620×200
Type of cooling: Ventilated
Temperature: 2-8℃
Refrigerant Gas: R134a
GN: 8×1/6×100mm



**Refrigerated Top
R60-2C**

Voltage: 220V/50z
Power: 350W
Capacity: 2×GN1/1
N.W.: 36kg
Size: 1100×680×285mm



**Drop-in Refrigerated Well
ZCSB-XB157**

Power (kW) 0.38
Net Weight (KG) 50.0
Dimensions(mm) 1056×600×535
Cut-out dim(mm) 1016×569
Frequency 50Hz/60Hz
Voltage 220-240V

*Capable for 3 pcs 6" GN1/1 pans (not included)
 *2-8℃

*Refrigerated wells with hole and water drain tap.

Ice Cream Machine

Refrigeration Parts

Compressor: TECUMSEH, DORIN, MANEUROP DANFOSS from France and ASPERA from Italy

Refrigerant: R404a and R134a, CFC-free

Expand valve and Dual pressure control: DANFOSS from Denmark Condenser:

Internal thread copper pipe, High efficiency heat exchanger

Electronic Parts

SCHNEIDER ELECTRIC "TELEMECANIQUE" from France.

Freezing Cylinder

Seamless, cold-drawn, hygiene standard, AISI 304 stainless steel. Direct contact of refrigerant and cylinder wall, no copper wraps. High output capacity with energy savings up to 30%

Electronic Controls

The microprocessor controls regulating refrigeration by measuring product viscosity to maintain consistent quality.

Counter which can record number of dispenses per day and total dispensing.

Mix Hopper

Separate hopper refrigeration, by separate compressor or solenoid valve to pre-cool mix and maintain mix below 4.4 C.

Indicator Lights

The Mix Low light alerts the operator to add mix.

Standby

During long no-use periods, the standby feature maintains safe product temperature in the mix hoppers and freezing cylinders.

Hardness Digital Indicator

The product viscosity is displayed to assure safe product.

Safety

Internal overload protection is built into motor and compressor. Additional thermal overload protects the entire machine.

Thermostat cuts off machine when over-freezing. High pressure switch prevents compressor overheating.

Options

Power supply: 220V/60HZ/1PH, 220V/60HZ/3PH, 380V/60HZ/3PH Local special plugs.



Soft Ice Cream Machine

Single Flavor, Table Model
Gravity Freezer

ICM-SC40-1

Dimension (LxWxH): 440×700×721mm

Hopper Capacity: 8L

Cylinder: 1.7L

Voltage: 220V/50Hz

Power: 1.8Kw

Refrigerant: R404a

Output: 18L/H, 100 cup/H, 80g/cup at 24 degree

Beater Motor: One, 1.25 HP×1

Main compressor: One, 3150 BTU

N.W/G.W: 101/115kg

Packing size: 500×770×890mm



Soft Ice Cream Machine

Single Flavor, Table Model
Gravity Freezer

ICM-SC18E-1

Dimension (LxWxH): 440×700×721mm

Hopper Capacity: 8L

Cylinder: 1.7L

Voltage: 220V/50Hz

Power: 1.8Kw

Refrigerant: R404a

Output: 18L/H, 100 cup/H, 80g/cup at 24 degree

Beater Motor: One, 1.25 HP×1

Main compressor: One, 3150 BTU

N.W/G.W: 101/115kg

Packing size: 500×770×890mm



Soft Ice Cream Machine

Single Flavor, Table Model
Gravity Freezer

ICM-SC18-1

Dimension (LxWxH): 440×700×721mm

Hopper Capacity: 8L

Cylinder: 1.7L

Voltage: 220V/50Hz

Power: 1.8Kw

Refrigerant: R404a

Output: 18L/H, 100 cup/H, 80g/cup at 24 degree

Beater Motor: One, 1.25 HP×1

Main compressor: One, 3150 BTU

N.W/G.W: 101/115kg

Packing size: 500×770×890mm

Ice Cream Machine



Soft Ice Cream Machine

Twin Twist Flavors, Table Model,
Gravity Freezer

6225

Dimension(LxWxH): 553×653×957 mm
Hopper Capacity: 12LX2
Cylinder: 1.7L X2
Voltage: 220V/50Hz
Power: 2.4 Kw
Refrigerant: R404a
Output: 25 Liters/Hour 270cups/Hour
 80g/cup at 24 degree
Beater Motor: One, 1.25 HP×1
Main compressor: One, 3150 BTU
N.W/G.W: 155/170 kg
Packing size: 500×770×890 mm



Soft Ice Cream Machine

Twin Twist Flavors, Table Model,
Gravity Freezer

6245

Dimension(LxWxH): 553×792×954 mm
Hopper Capacity: 12LX2
Cylinder: 1.7L X2
Voltage: 220V/50Hz
Power: 3.5 Kw
Refrigerant: R404a
Output: 45 Liters/Hour 580cups/Hour
 80g/cup at 24 degree
Beater Motor: two, 1.25 HP×2
Main compressor: two, 3650 BTU×2
N.W/G.W: 195/212 kg
Packing size: 625×935×1145 mm



Soft Ice Cream Machine

Single Flavor, Floor Model
Gravity Freezer

6335

Dimension(LxWxH): 553×653×957 mm
Hopper Capacity: 15.00 Liters with agitation mixer
Cylinder: 3.20 Liters beater with blade knife
Voltage: 380V/50Hz
Power: 2.7Kw Computerized control system
Refrigerant: R134a
Output: 40 Liters/Hour 450cups/Hour
 80g/cup at 24 degree
Beater Motor: One, 1.25 HP×1
Main compressor: One, 4800 BTU
N.W/G.W: 148/163 kg
Packing size: 500×770×890 mm



Soft Ice Cream Machine

Twin Twist Flavors, Table Model,
Gravity Freezer

6240

Dimension(LxWxH): 553×653×1374 mm
Hopper Capacity: 12.00 Liters×2
Cylinder: 1.70 Liters×2
Voltage: 220V, 50Hz, 1Ph
Power: 2.7Kw Computerized control system
Refrigerant: R134a
Output: 40 Liters/Hour 290cups/Hour 80g/cup at 24 degree
Beater Motor: One, 3650 BTU
Main compressor: One compressor, 4800 BTU, R134a
N.W/G.W: 163/178 kg
Packing size: 650×780×1580 mm



Granita Slush Dispenser & Milk Shaker

Single Flavor, table Model,
Gravity Freezer,

6430

Dimension(LxWxH): 414×619×731 mm
Voltage: 220V, 50 Hz, 1Ph.
Power: 1.5 Kw
Net Weight: 85Kg,
Gross Weight: 96Kg
Capacity: 15 Liters/Hour 80cups/Hour
 250ml/cup at 24 degree
Cylinder: 3.80 Liters
Hopper: 25.00 Liters
Beater Motor: one, 1/3HP
Main compressor: one, 5000 BTU, R404a
N.W/G.W: 85/96kg
Packing size: 465 x 750 x 900mm



Frosty Swirl Machine

FS-1

Dimension(LxWxH): 340×575×971 mm
Voltage: 220V, 50Hz, 1Ph.
Power: 2.2 Kw
Beater Motor: one, 1.25HP
N.W/G.W: 76/89kg
Packing size: 405×663×1030 mm

Water connection:
 Water inlet connection is on back of chassis
 Water drain connection is under the chassis

Makes flavor rich milkshakes, smoothies and juice with ice cream, frozen yogurt, fresh fruits, nuts, cookies and more.

Ice Maker



CE

Ice Maker

IM-X890

Voltage: 220/50HZ
Capacity: 890kg/24h
Power: 4.059Kw
Storage Capacity: 500kg
Refrigerant: R404
Compressor: France Tecumseh or US Cperland
Cooling Mode: Air Cooling / Water Cooling
Dimension: 1260×830×1950mm

IM-X665

Voltage: 220/50HZ
Capacity: 665kg/24h
Power: 3.064Kw
Storage Capacity: 500kg
Refrigerant: R404
Compressor: France Tecumseh or US Cperland
Cooling Mode: Air Cooling / Water Cooling
Dimension: 1260×830×1780mm

IM-X445

Voltage: 220/50HZ
Capacity: 445kg/24h
Power: 2.313Kw
Storage Capacity: 200kg
Refrigerant: R404
Compressor: Aspera
Cooling Mode: Air Cooling / Water Cooling
Dimension: 760×830×1750mm



CE

Ice Maker

IM-X360

Voltage: 220/50HZ
Capacity: 360kg/24h
Power: 1.65Kw
Storage Capacity: 200kg
Refrigerant: R404
Compressor: Aspera
Cooling Mode: Air Cooling & Water Cooling
Dimension: 760×830×1630mm

IM-X318

Voltage: 220/50HZ
Capacity: 318kg/24h
Power: 1.374Kw
Storage Capacity: 200kg
Refrigerant: R404
Compressor: Aspera
Cooling Mode: Air Cooling / Water Cooling
Dimension: 760×830×1580mm

IM-X227

Voltage: 220/50HZ
Capacity: 227kg/24h
Power: 0.95Kw
Storage Capacity: 200kg
Refrigerant: R404
Compressor: Aspera
Cooling Mode: Air Cooling / Water Cooling
Dimension: 760×830×1580mm



CE

IM-X45

Voltage: 220/50HZ
Capacity: 45kg/24h
Power: 0.46Kw
Storage Capacity: 15kg
Refrigerant: R134
Compressor: Aspera
Cooling Mode: Air Cooling
Dimension: 510×590×790mm

IM-X36

Voltage: 220/50HZ
Capacity: 36kg/24h
Power: 0.39Kw
Storage Capacity: 15kg
Refrigerant: R134
Compressor: Aspera
Cooling Mode: Air Cooling
Dimension: 510×590×790mm



CE



Ice Maker

IM-X118

Voltage: 220/50HZ
Capacity: 118kg/24h
Power: 0.71Kw
Storage Capacity: 45kg
Refrigerant: R134
Compressor: Aspera
Cooling Mode: Air Cooling / Water Cooling
Dimension: 680×680×950mm

IM-X96

Voltage: 220/50HZ
Capacity: 96kg/24h
Power: 0.65Kw
Storage Capacity: 45kg
Refrigerant: R134
Compressor: Aspera
Cooling Mode: Air Cooling / Water Cooling
Dimension: 680×680×950mm

IM-X67

Voltage: 220/50HZ
Capacity: 67kg/24h
Power: 0.539Kw
Storage Capacity: 45kg
Refrigerant: R134
Compressor: Aspera
Cooling Mode: Air Cooling / Water Cooling
Dimension: 680×680×950mm

Chocolate Dispenser, Ice Cream Machine

Hot Chocolate Dispenser

- Suitable for hot chocolate, tea, coffee, milk and mulled wine, etc.



CE

BV-MCHOCO5L

Dimensions(LxWxH): 410x280x465mm
Volume: 5L
Temperature: +85°C
Voltage: 220V
Power: 1000W
N.W: 6.8 kgs



CE

BV-MCHOCO10L

Dimensions(LxWxH): 410x280x580mm
Volume: 10L
Temperature: +85°C
Voltage: 220V
Power: 1000W
N.W: 7.5 kgs

Soft Ice Cream Machine

- Suitable for making soft ice cream, slush, milk shake and other frozen drink.
- With light canopy



CE

ICYM-M-1SC

Dimensions(LxWxH): 307x469x697mm
Volume: 1x6L
Temperature: -7~0 °C
Voltage: 220V/50Hz
Power: 350 W
N.W: 28 kgs



CE

ICYM-M-2SC

Dimensions(LxWxH): 537x469x697mm
Volume: 2x6L
Temperature: -7~0 °C
Voltage: 220V/50Hz
Power: 600 W
N.W: 50 kgs



Juice Dispenser



BV-DCD30

Dimensions(LxWxH): 535x520x808 mm
Volume: 30L
Voltage: 220V/50Hz
Current: 3.2A
N.W: 32 kgs
 Cool Only



BV-DCD8-4

Dimensions(LxWxH): 520x400x680 mm
Volume: 4x8 L
Voltage: 220V/50Hz
Current: 4.0 A
N.W: 39 kgs
 Cool Only



Slush Machine

SLUSH MAKER

- 1.Compact and luxurious
- 2.Advanced electronic temperature controller with a digital display that indicated the temperature of the beverages.
- 3.High quality in compressor and wonderful working performance
- 4.LED light in illumination
- 5.304 stainless steel chassis and ABS panels
- 6.Food-grade high density polycarbonate bowl,healthy and environmental protection
- 7.Drip tray with flow indicator warning when full
- 8.Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene



CE

BV-MS1

Dimension(LxWxH): 240x510x810mm
Voltage: 220V/50Hz
Power: 0.62Kw
Temperature: -2~-4 °C
Capacity:12L
N.W: 24 kgs



CE

BV-MS2

Dimension(LxWxH): 470x510x810mm
Voltage: 220V/50Hz
Power: 0.86Kw
Temperature: -2~-4 °C
Capacity:2X12L
N.W: 48 kgs



CE

BV-MS3

Dimension(LxWxH): 710x510x810mm
Voltage: 220V/50Hz
Power: 1.28 Kw
Temperature: -2~-4 °C
Capacity:3X12L
N.W: 72 kgs



BV-DSL1

Dimension(LxWxH): 200x480x860mm
Voltage: 220V/50Hz
Current: 4.5A
Temperature: -2~-4 °C
Capacity:12L
N.W: 31 kgs



BV-DSL2

Dimension(LxWxH): 400x480x860mm
Voltage: 220V/50Hz
Current: 7.0 A
Temperature: -2~-4 °C
Capacity:2X12L
N.W: 46 kgs



BV-DSL3

Dimension(LxWxH): 600x480x860mm
Voltage: 220V/50Hz
Current: 8.4 A
Temperature: -2~-4 °C
Capacity:3X12L
N.W: 65 kgs

Juice Dispenser



**Juice Dispenser, Cold, Paddle
Stirring System. One Bowl**

BV-MJD1S

Dimension: 230×430×640mm
Volume: 1×12L
Voltage: 220V/50Hz
Power: 211W
Net Weight: 22kg
Temperature: 3-8 °C
Packing Size: 340×550×720mm



**Juice Dispenser, Cold, Paddle
Stirring System. Two Bowl**

BV-MJD2S

Dimension: 430×430×640mm
Volume: 2×12L
Voltage: 220V/50Hz
Power: 318W
Net Weight: 31.5kg
Temperature: 3-8 °C
Packing Size: 540×550×720mm



**Juice Dispenser, Cold, Paddle
Stirring System. Three Bowl**

BV-MJD3S

Dimension: 630×430×640mm
Volume: 3×12L
Voltage: 220V/50Hz
Power: 412W
Net Weight: 39.5kg
Temperature: 3-8 °C
Packing Size: 740×550×720mm



**Juice Dispenser, Cold, Pump
Spraying System. One Bowl**

BV-MJD1P

Dimension: 230×430×640mm
Volume: 1×12L
Voltage: 220V/50Hz
Power: 240W
Net Weight: 22kg
Temperature: 3-8 °C
Packing Size: 340×550×720mm



**Juice Dispenser, Cold, Pump
Spraying System. Two Bowl**

BV-MJD2P

Dimension: 430×430×640mm
Volume: 2×12L
Voltage: 220V/50Hz
Power: 376W
Net Weight: 31.5kg
Temperature: 3-8 °C
Packing Size: 540×550×720mm



**Juice Dispenser, Cold, Pump
Spraying System. Three Bowl**

BV-MJD3P

Dimension: 630×430×640mm
Volume: 3×12L
Voltage: 220V/50Hz
Power: 499W
Net Weight: 39.5kg
Temperature: 3-8 °C
Packing Size: 740×550×720mm



**Juice Dispenser, Cold, Pump+
Paddle System. Two Bowl**

BV-MJD1SP

Dimension: 430×430×640mm
Volume: 3×12L
Voltage: 220V/50Hz
Power: 347W
Net Weight: 31.5kg
Temperature: 3-8 °C
Packing Size: 540×550×720mm



**Juice Dispenser, Cold, Pump+
Paddle+Pump System. Three Bowl**

BV-MJD3PSP

Dimension: 630×430×640mm
Volume: 3×12L
Voltage: 220V/50Hz
Power: 441W
Net Weight: 39.5kg
Temperature: 3-8 °C
Packing Size: 740×550×720mm



**Juice Dispenser, Cold, Paddle+
Pump+Paddle System. Three Bowl**

BV-MJD3SPS

Dimension: 630×430×640mm
Volume: 3×12L
Voltage: 220V/50Hz
Power: 470W
Net Weight: 39.5kg
Temperature: 3-8 °C
Packing Size: 740×550×720mm


Color Option: Yellow, Green, White, Gray

Walk In Cool Room & Freezer Room

1. Panels Introduction

A. Material

100% polyurethane insulation sandwich panels with rubber margin system, easy to assemble;
Being foamed in place with high pressure;
Standard dimensions are available, the maximum Length of panels is 12 meters;
Non-standard sizes are also available upon request with prices varying.



B. Panels Thickness

Panel Thickness (mm)	Operating Temp
50	5 °C or above
75	-5 °C or above
100	-25 °C or above
150	-45 °C or above
200	-55 °C or above

C. Panels Installation.

Every panels consists of tongue and groove construction and can be tightened by a number of exocentric fasteners, which may be unscrewed easily with a hexagonal key



2. Choice of the surface finished

- A. Stucco Embossed Aluminium
- B. Stainless Steel
- C. Painted Galvanized Mild Steel
- D. PVC Steel
- E. Standard floor panels : 1.0mm galvanized mild steel

3. Cold Room Door



A Convex Hinged Door B Hinged Door



C Sliding Door

